



TEXTILE INDUSTRIAL DRYERS


STANDARD FEATURES

- Direct drive geared motor
- Direct drive blower motor
- Pneumatic tilting cylinder
- Tempered glass door
- Stainless steel SUS304 drum material
- Built-in PLC-touchscreen
- Steam coil heating source
- Large size lint filter

EXTRA OPTIONS

Thanks to a wide range of options the dryers can be optimized for your specific needs.

- Gas burner heating source
- Infrared heating sensor
- Fresh air flap
- Special voltage
- Variable speed blower

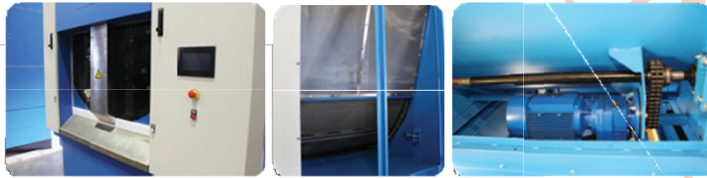

TYPE	T16/10 HK	T16/15 HK	T16/20 HK	T18/15 HK	T18/186 HK
Loading capacity in kilograms	100 (1:20)	150 (1:20)	200 (1:20)	200 (1:20)	250 (1:20)
	80 (1:25)	120 (1:25)	160 (1:25)	160 (1:25)	200 (1:25)
	66 (1:30)	100 (1:30)	135 (1:30)	133 (1:30)	166 (1:30)
Drum volume	2000 L	3000 L	4000 L	4000 L	5000 L
Drum diameter	1600 mm	1600 mm	1600 mm	1850 mm	1850 mm
Drum length	1000 mm	1500 mm	2000 mm	1500 mm	1860 mm
Drive motor	3.0 kW	4.0 kW	4.0 kW	4.0 kW	5.0 kW
Fan motor	10 kW	15 kW	2x 7.5 kW	15 kW	15 kW
Drum variable speed	Standard	Standard	Standard	Option	Option
Power supply	380 V/50 Hz	380 V/50 Hz	380 V/50 Hz	380 V/50 Hz	380 V/50 Hz
Electric consumption	15 kW (Max.)	20 kW (Max.)	20 kW (Max.)	20 kW (Max.)	20 kW (Max.)
Steam consumption	300 Kg/H	350 Kg/H	400 Kg/H	400 Kg/H	450 Kg/H
Exhaust air	9000 M3/H	12000 M3/H	15000 M3/H	15000 M3/H	18000 M3/H
Steam inlet / Condensate	DN40 (1.5") DN40 (1.5")	DN40 (1.5") DN40 (1.5")	DN40 (1.5") DN40 (1.5")	DN50 (2") DN40 (1.5")	DN50 (2") DN40 (1.5")
Width (W)	2300 mm	2300 mm	2300 mm	2300 mm	2300 mm
Height (H)	3250 mm	3250 mm	3250 mm	3300 mm	3300 mm
Length (L)	2185 mm	2685 mm	3185 mm	2700 mm	3100 mm
Weight (Kg)	4200 Kg	4700 Kg	5300 Kg	5000 Kg	5350 Kg